

No. 252

Date: 27.09.2012

Temporary Lock out (TLO) Cylinder

This new product is an evolution of an existing application.

It is a mechanical cylinder that allows the user to control access rights with special keys.

The TLO cylinder includes a set of four colour - coded keys:

- **Blue Key** - This key is for temporary usage which works by the "authorization mode" operated by the Red & Green keys.
- **Red Key** - When rotating at least 90° clock wise and counter clock wise, on the cylinder external side, it activates the lock out and prevents the Blue key holder from operating the cylinder.
- **Green Key** - When rotating at least 90° clock wise and counter clock wise, on the cylinder external side, it stops the temporary lock out (mechanically) and allows the Blue key holders from operating the cylinder.
- **White Key** - Neutral key for day-to-day use which works in all cases.

Take control with the TLO Cylinder:


- **Complete Control** — Decide when and for how long you want to provide access to blue key holders.
- **Extra Efficient** — No need to replace the cylinder or collect all keys to prevent access.



Mul-T-Lock Technologies Ltd., Technical Support Department

Tel: 972-8-9424318 | Fax: 972-8-9424418 | tech.support@mul-t-lock.com

PRODUCT UPDATE

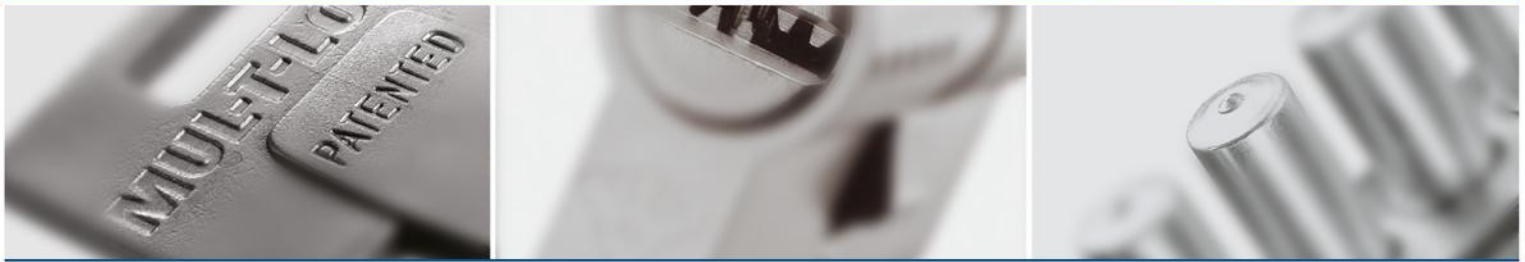

- **Cost Effective** — Eliminates the need for additional locks that are often installed to provide access control.
- **Simple to use and install** — Standard mechanical cylinder installation with no wiring, software or expensive electronic systems involved.

Logistic implications.

- Available in Mul-T-Lock's Interactive+ platform only.
- Includes 6 keys as a standard (3 white, 1 blue, 1 red, 1 green)
- The TLO application fits products which can operate after installation, at least 90° CW (clock wise) and CCW (counter clock wise).
- Supplied with a single magnetic strip card, printed with all key codes.
 - magnetic strip carries only the white key code.
- Marketing information is already available on the website.
- Old configuration will not be available with the exception of parts for maintaining existing products/systems.
- New part number will be established subjected to orders.

You can place your order now with your sales coordinator.



Mul-T-Lock Technologies Ltd., Technical Support Department
Tel: 972-8-9424318 | Fax: 972-8-9424418 | tech.support@mul-t-lock.com